


Single stage belt driven compressors

A39 Range

Higher power, increased air flow.

Applications

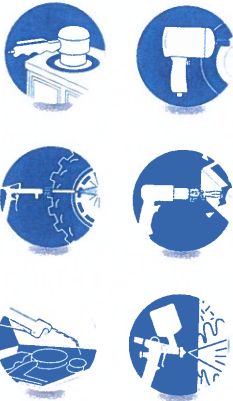

Innovative design

Special belt guard design for improved cooling

Reliability

Cast iron cylinder

Performance

Slow speed pump design reduces operating temperatures

User-friendly

Easy oil check up and refilling



A39 150 CM3

3 hp, 150 litres

Model	Part number	L	Config.	l/min	HP	kW	rpm	Volts	Bars	dB(A)	L x W x H (mm)	kg
X A39 100 CM3 X	4116024566	100	C	393	3	2.2	1050	230/1/50	10	93	1180 x 460 x 930	72
A39 100 CT3	4116024567	100	C	393	3	2.2	1050	400/3/50	10	93	1180 x 460 x 930	72
A39 150 CM3	4116024149	150	C	393	3	2.2	1050	230/1/50	10	93	1375 x 420 x 950	87
A39 150 CT3	4116024150	150	C	393	3	2.2	1050	400/3/50	10	93	1375 x 420 x 950	87

* 60Hz versions available on request

